

廃番対象品一覧

		シリーズ 名称	対象型番数 (全型番／部分)		カタログ 掲載ページ
1	BAタイプ	BTCA	2	部分	P.321
2	BAタイプ	BTSA	2	部分	P.325
3	シャフトホルダー	BHS	6	全型番	P.336
4	BTUタイプ	BTU	23	全型番	P.343
		合計	33		

BAタイプBTCA

- 呼び径φ6の2型番が廃番となります。

オイルスライドシフター BAタイプ(アルミハウジングタイプ) BTCA BGS/BGSP



RoHS2 ELV

Part No.	φd	L	φD	W	B	ℓ1	W1	取付穴 M	P	PA	質量 kg	固定ネジ締付トルク N・m(kgf・m)	ガイドシャフトとの 標準クリアランス(mm)
BTCA6-50	6	50	12	20	6	2.5	14	M3×5	25	12.5	0.03	0.98 [0.10]	0.035~0.070
BTCA6-75	6	75	12	20	8	2.5	14	M3×5	50	12.5	0.07	0.98 [0.10]	0.035~0.070
BTCA8-50	8	50	14	22	8	2.5	15	M3×5	25	12.5	0.04	0.98 [0.10]	0.018~0.105
BTCA8-75	8	75	14	22	10	2.5	15	M3×5	50	12.5	0.09	0.98 [0.10]	0.018~0.105
BTCA10-50	10	50	16	25	10	2.5	18	M4×6	20	15	0.07	2.4 [0.24]	0.016~0.106
BTCA10-75	10	75	16	25	12	2.5	18	M4×6	45	15	0.11	2.4 [0.24]	0.016~0.106
BTCA10-100	10	100	16	25	12	2.5	18	M4×6	70	15	0.14	2.4 [0.24]	0.016~0.106
BTCA12-50	12	50	20	30	12	3.0	20	M4×6	20	15	0.11	2.4 [0.24]	0.024~0.119
BTCA12-75	12	75	20	30	15	3.0	20	M4×6	45	15	0.16	2.4 [0.24]	0.024~0.119
BTCA12-100	12	100	20	30	15	3.0	20	M4×6	70	15	0.21	2.4 [0.24]	0.024~0.119
BTCA16-50	16	50	25	35	15	3.0	25	M5×8	25	15	0.14	4.9 [0.50]	0.034~0.127
BTCA16-75	16	75	25	35	15	3.0	25	M5×8	40	17.5	0.20	4.9 [0.50]	0.034~0.127
BTCA16-100	16	100	25	35	20	3.0	25	M5×8	65	17.5	0.27	4.9 [0.50]	0.034~0.127
BTCA16-125	16	125	25	35	20	3.0	25	M5×8	90	17.5	0.34	4.9 [0.50]	0.034~0.127
BTCA20-75	20	75	30	45	20	3.0	30	M6×11	40	17.5	0.34	7.8 [0.80]	0.039~0.150
BTCA20-100	20	100	30	45	20	3.0	30	M6×11	60	20	0.45	7.8 [0.80]	0.039~0.150
BTCA20-125	20	125	30	45	20	3.0	30	M6×11	85	20	0.56	7.8 [0.80]	0.039~0.150
BTCA20-150	20	150	30	45	30	3.0	30	M6×11	110	20	0.68	7.8 [0.80]	0.039~0.150
BTCA20-200	20	200	30	45	30	3.0	30	M6×11	160	20	0.91	7.8 [0.80]	0.039~0.150
BTCA20-250	20	250	30	45	30	3.0	30	M6×11	210	20	1.13	7.8 [0.80]	0.039~0.150
BTCA25-75	25	75	35	50	20	3.5	35	M6×11	40	17.5	0.40	7.8 [0.80]	0.042~0.153
BTCA25-100	25	100	35	50	20	3.5	35	M6×11	60	20	0.53	7.8 [0.80]	0.042~0.153
BTCA25-150	25	150	35	50	30	3.5	35	M6×11	110	20	0.80	7.8 [0.80]	0.042~0.153
BTCA25-200	25	200	35	50	35	3.5	35	M6×11	160	20	1.07	7.8 [0.80]	0.042~0.153
BTCA25-250	25	250	35	50	35	3.5	35	M6×11	210	20	1.33	7.8 [0.80]	0.042~0.153
BTCA30-75	30	75	42	60	20	3.5	40	M8×13	35	20	0.58	20 [2.00]	0.045~0.160
BTCA30-100	30	100	42	60	20	3.5	40	M8×13	50	25	0.77	20 [2.00]	0.045~0.160
BTCA30-150	30	150	42	60	30	3.5	40	M8×13	100	25	1.16	20 [2.00]	0.045~0.160
BTCA30-200	30	200	42	60	40	3.5	40	M8×13	150	25	1.55	20 [2.00]	0.045~0.160
BTCA30-250	30	250	42	60	40	3.5	40	M8×13	200	25	1.93	20 [2.00]	0.045~0.160
BTCA30-300	30	300	42	60	40	3.5	40	M8×13	250	25	2.32	20 [2.00]	0.045~0.160
BTCA40-100	40	100	52	70	30	3.5	50	M10×16	40	30	0.97	37 [3.80]	0.050~0.165
BTCA40-150	40	150	52	70	30	3.5	50	M10×16	90	30	1.44	37 [3.80]	0.050~0.165

BAタイプBTSA

- 呼び径φ6の2型番が廃止となります。



Part No.	φd	L	W	B	W1	P	ネジ M	PA	質量 kg	固定ネジ締付トルク N・m [kgf・m]	ガイドシャフトとの 標準クリアランス (mm)
BTSA6-25	6	25	20	6	14	15	M3×5	5	0.02	0.98 [0.10]	0.035～0.070
BTSA6-50	6	50	20	6	14	25	M3×5	12.5	0.04	0.98 [0.10]	0.035～0.070
BTSA8-25	8	25	22	6	15	15	M3×5	5	0.03	0.98 [0.10]	0.018～0.105
BTSA8-50	8	50	22	8	15	25	M3×5	12.5	0.06	0.98 [0.10]	0.018～0.105
BTSA10-25	10	25	25	8	18	15	M4×6	5	0.04	2.4 [0.24]	0.016～0.106
BTSA10-50	10	50	25	10	18	25	M4×6	12.5	0.08	2.4 [0.24]	0.016～0.106
BTSA12-30	12	30	30	10	20	15	M4×6	7.5	0.08	2.4 [0.24]	0.024～0.119
BTSA12-50	12	50	30	12	20	25	M4×6	12.5	0.13	2.4 [0.24]	0.024～0.119
BTSA16-30	16	30	35	10	25	15	M5×8	7.5	0.10	4.9 [0.50]	0.034～0.127
BTSA16-50	16	50	35	15	25	25	M5×8	12.5	0.17	4.9 [0.50]	0.034～0.127
BTSA20-50	20	50	45	12	30	25	M6×11	12.5	0.23	7.8 [0.80]	0.039～0.150
BTSA20-75	20	75	45	20	30	45	M6×11	15	0.35	7.8 [0.80]	0.039～0.150
BTSA25-50	25	50	50	12	35	25	M6×11	12.5	0.27	7.8 [0.80]	0.042～0.153
BTSA25-75	25	75	50	20	35	45	M6×11	15	0.41	7.8 [0.80]	0.042～0.153
BTSA30-50	30	50	60	12	40	25	M8×13	12.5	0.39	20 [2.00]	0.045～0.160
BTSA30-75	30	75	60	20	40	45	M8×13	15	0.59	20 [2.00]	0.045～0.160

シャフトホルダー BC/BFタイプ用

- シャフトホルダーBHS の全6型番が廃番となります。

BHS

オイルレスシャフトホルダー(BC/BFタイプ用)

RoHS2 ELV

Part No.の表示方法

■ BHSタイプ

BHS 穴径 でご指示ください。


Part No.

(例)穴径16mmの場合


BHS16

部品図


■ BHS16 (シャフトホルダー)

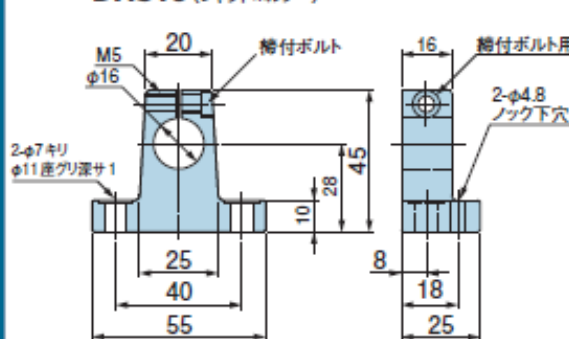


■ BHS20 (シャフトホルダー)

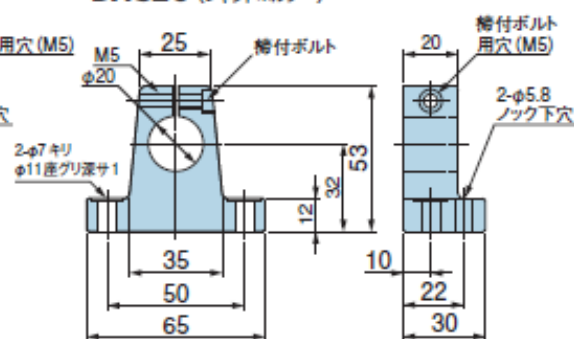


■ BHS25 (シャフトホルダー)

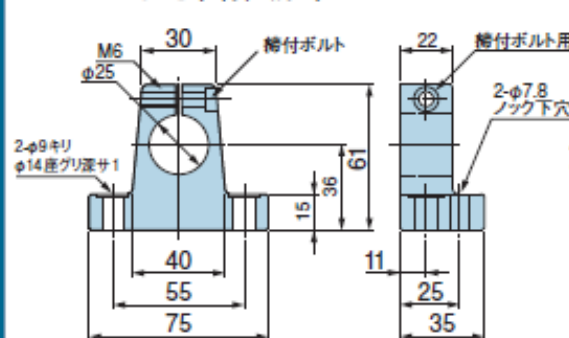


■ BHS30 (シャフトホルダー)

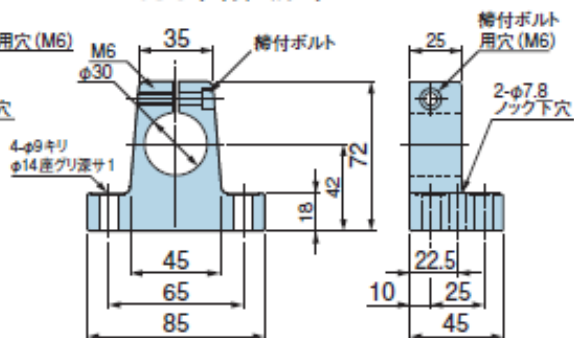

■ BHS40 (シャフトホルダー)

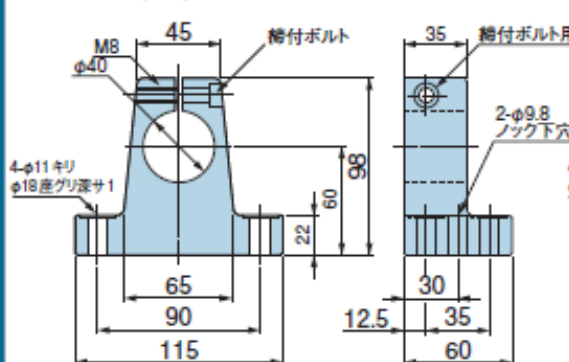


■ BHS50 (シャフトホルダー)

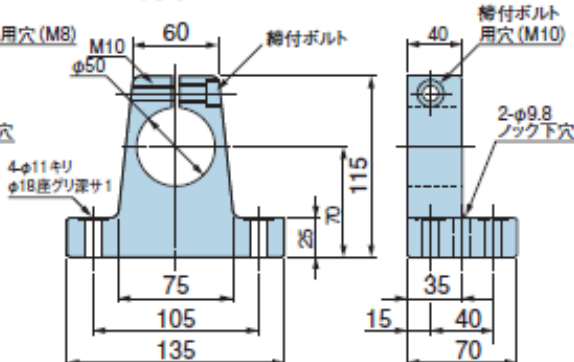

BTUタイプ

- BTUタイプ全23型番が廃止となります。

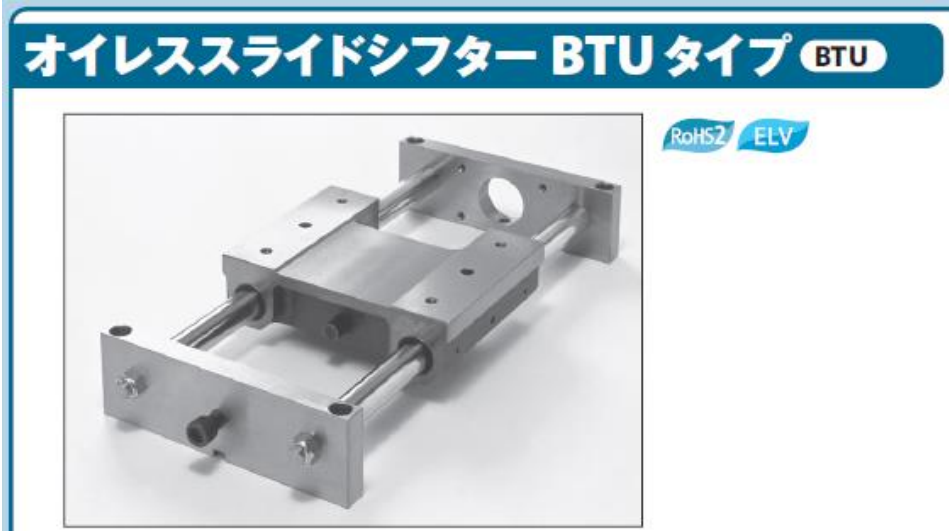

Part No.	ストローク S
BTU20-50	50
BTU20-100	100
BTU20-150	150
BTU20-200	200
BTU20-250	250

Part No.	ストローク S
BTU25-50	50
BTU25-100	100
BTU25-150	150
BTU25-200	200
BTU25-250	250

Part No.	ストローク S
BTU30-50	50
BTU30-100	100
BTU30-150	150
BTU30-200	200
BTU30-250	250
BTU30-300	300

Part No.	ストローク S
BTU40-50	50
BTU40-100	100
BTU40-150	150
BTU40-200	200
BTU40-250	250
BTU40-300	300
BTU40-350	350