


SPW オイレス #500SP1 SL1 スラストワッシャー




適用する内径、厚みから Part No. を選んでください。
 (例)内径30.2mm、厚み5mmの場合

SPW - 3005
 Part No. をご指示ください。



- SPBと組み合わせて使用できます。
- 組み合わせはSPBを参照願います。
(P.187~P.190)
- Parts No.の末尾にN記号が付いている製品は取付穴なしのタイプです。

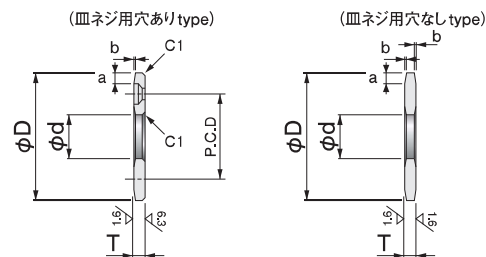

a b : 内外径部面取り

φd	~10.2	~18.2	~35.2	~45.2	~55.3	~100.5	120.5
a	1.5	2	2.5	3	4	5	4
b	0.3	0.4	0.4	0.5	0.6	0.8	0.8

(mm)

Part No.	内径		外径 φD	厚み		取付穴		
	φd	公差		T	公差	P.C.D	個数	皿ネジ
SPW-0603	6.2	+0.2 -0.1	25	3	0 -0.1	15	2	M3
SPW-0803	8.2	+0.2 -0.1	28	3	0 -0.1	18	2	M3
SPW-1003	10.2	+0.2 -0.1	30	3	0 -0.1	20	2	M3
SPW-1203	12.2	+0.2 -0.1	40	3	0 -0.1	28	2	M3
SPW-1203N	12.2	+0.2 -0.1	40	3	0 -0.1	皿ネジ用穴なし		
SPW-1303	13.2	+0.2 -0.1	40	3	0 -0.1	28	2	M3
SPW-1403	14.2	+0.2 -0.1	40	3	0 -0.1	28	2	M3
SPW-1503	15.2	+0.2 -0.1	50	3	0 -0.1	35	2	M3
SPW-1603	16.2	+0.2 -0.1	50	3	0 -0.1	35	2	M3
SPW-1603N	16.2	+0.2 -0.1	50	3	0 -0.1	皿ネジ用穴なし		
SPW-1803	18.2	+0.2 -0.1	50	3	0 -0.1	35	2	M3
SPW-2005	20.2	+0.2 -0.1	50	5	0 -0.1	35	2	M5
SPW-2505	25.2	+0.2 -0.1	55	5	0 -0.1	40	2	M5
SPW-2505N	25.2	+0.2 -0.1	55	5	0 -0.1	皿ネジ用穴なし		
SPW-3005	30.2	+0.2 -0.1	60	5	0 -0.1	45	2	M5
SPW-3005N	30.2	+0.2 -0.1	60	5	0 -0.1	皿ネジ用穴なし		
SPW-3505	35.2	+0.2 -0.1	70	5	0 -0.1	50	2	M5

Part No.	内径		外径 φD	厚み		取付穴		
	φd	公差		T	公差	P.C.D	個数	皿ネジ
SPW-4007	40.2	+0.2 -0.1	80	7	0 -0.1	60	2	M6
SPW-4507	45.2	+0.2 -0.1	90	7	0 -0.1	70	2	M6
SPW-5008	50.3	+0.3 -0.1	100	8	0 -0.1	75	4	M6
SPW-5508	55.3	+0.3 -0.1	110	8	0 -0.1	85	4	M6
SPW-6008	60.3	+0.3 -0.1	120	8	0 -0.1	90	4	M8
SPW-6508	65.3	+0.3 -0.1	125	8	0 -0.1	95	4	M8
SPW-7010	70.3	+0.3 -0.1	130	10	0 -0.1	100	4	M8
SPW-7510	75.3	+0.3 -0.1	140	10	0 -0.1	110	4	M8
SPW-8010	80.3	+0.3 -0.1	150	10	0 -0.1	120	4	M8
SPW-9010	90.5	+0.3 -0.1	170	10	0 -0.1	140	4	M10
SPW-10010	100.5	+0.3 -0.1	190	10	0 -0.1	160	4	M10
SPW-12010	120.5	+0.3 -0.1	200	10	0 -0.1	175	4	M10